




**Submittal Data: Ceiling Floor Split-System**  
**Model: CFU020A6CE/ORTC020F60**  
**Style: Electric Heat**


Job Name: \_\_\_\_\_ Location: \_\_\_\_\_  
 Purchaser: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Submitted To: \_\_\_\_\_ For:  Reference  Approval  Construction  
 Submitted By: \_\_\_\_\_  
 Unit Designation: \_\_\_\_\_ Schedule Number: \_\_\_\_\_ Model Number: \_\_\_\_\_

<b>Capacities:</b>		
Cooling	Btu/Hr	19,500
Heating	Btu/Hr	19,500
Outdoor Temp.	F°	95
SEER		11.9
Average Cooling Capacity (ft)		1,000
<b>Indoor Unit</b>		
Power Supply	Volts	220
Power Supply	Hertz	60
Moisture Removal	Lbs/Hr	6.61
Weight	Lbs	94.8
Air Flow Rate	CFM	600
<b>Outdoor Unit:</b>		
Power Supply	Volts	220
Max Fuse Size	Amps	20
Running Current	Amps	10.41
Weight	Lbs	141.1
<b>Refrigerant Piping:</b>		
Max Height Difference	Feet	25
Max Total Length	Feet	54
Discharge Liquid Line	Inch	3/8"
Suction Line	Inch	5/8"
Drain Line	Inch	3/4"

**Outline and Dimensions**

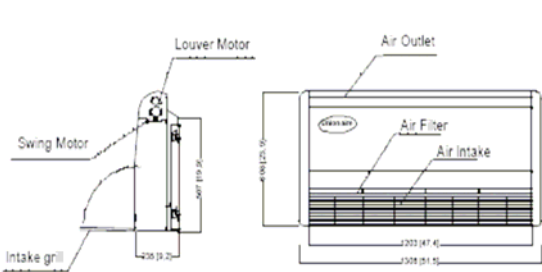

Depth: 9.25 in. Width: 51.5 in. Height: 23.94 in.

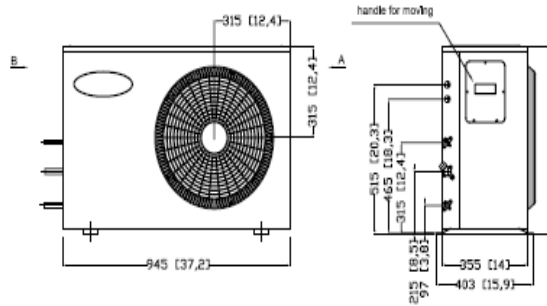

Depth: 14.02 in. Width: 37.2 in. Height: 25.55 in.

**Standard Features:**

- Five Year Compressor Warranty
- R22 Refrigerant
- "Dry" Mode Reduces Water
- 24-Hour Programmable Timer
- Low-Pressure Protection Switch
- One Year Parts Warranty
- LCD Wireless Remote
- Energy Saving "Sleep" Mode
- 3 Stage Indoor Fan Speed
- High-Pressure Protection Switch
- Low Ambient Control Kit
- Self-Diagnosis Function
- "Hydrophilic" Blue Coated Fins
- Heavy-Gauge Galvanized Steel
- Outlet Air Directional Control

**Notes:**

---



---



---



---