




Submittal Data: **Ceiling Floor Split-System**  
 Model: **CFU036A6CE/ORHC036F60**  
 Style: **Electric Heat**


Job Name: \_\_\_\_\_ Location: \_\_\_\_\_  
 Purchaser: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Submitted To: \_\_\_\_\_ For:  Reference  Approval  Construction  
 Submitted By: \_\_\_\_\_  
 Unit Designation: \_\_\_\_\_ Schedule Number: \_\_\_\_\_ Model Number: \_\_\_\_\_

<b>Capacities:</b>		
Cooling	Btu/Hr	36,000
Heating	Btu/Hr	36,000
Outdoor Temp.	F°	95
SEER		11.9
Average Cooling Capacity (ft)		1,800
<b>Indoor Unit</b>		
Power Supply	Volts	220
Power Supply	Hertz	60
Moisture Removal	Lbs/Hr	11.79
Weight	Lbs	119.0
Air Flow Rate	CFM	1,050
<b>Outdoor Unit:</b>		
Power Supply	Volts	220
Max Fuse Size	Amps	40
Running Current	Amps	17.90
Weight	Lbs	202.8
<b>Refrigerant Piping:</b>		
Max Height Difference	Feet	32
Max Total Length	Feet	60
Discharge Liquid Line	Inch	3/8"
Suction Line	Inch	3/4"
Drain Line	Inch	3/4"

**Outline and Dimensions**

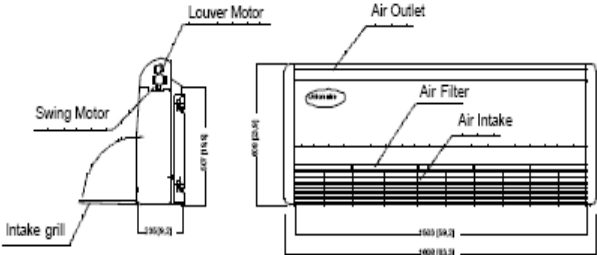

Depth: 9.25 in. Width: 63.31 in. Height: 23.94 in.

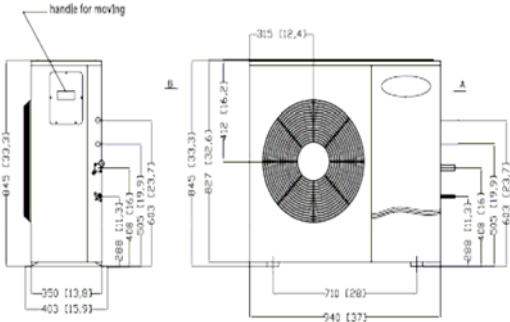

Depth: 14.02 in. Width: 37.2 in. Height: 33.27 in.

**Standard Features:**

- Five Year Compressor Warranty
- R22 Refrigerant
- "Dry" Mode Reduces Water
- 24-Hour Programmable Timer
- Low-Pressure Protection Switch
- One Year Parts Warranty
- LCD Wireless Remote
- Energy Saving "Sleep" Mode
- 3 Stage Indoor Fan Speed
- High-Pressure Protection Switch
- Low Ambient Control Kit
- Self-Diagnosis Function
- "Hydrophilic" Blue Coated Fins
- Heavy-Gauge Galvanized Steel
- Outlet Air Directional Control

**Notes:**

---



---



---



---