




**Submittal Data: Ceiling Floor Split-System**  
**Model: CFU012A6CO/ORTC012F60**  
**Style: Cool Only**


Job Name: \_\_\_\_\_ Location: \_\_\_\_\_  
 Purchaser: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Submitted To: \_\_\_\_\_ For:  Reference  Approval  Construction  
 Submitted By: \_\_\_\_\_  
 Unit Designation: \_\_\_\_\_ Schedule Number: \_\_\_\_\_ Model Number: \_\_\_\_\_

<b>Capacities:</b>		
Cooling	Btu/Hr	12,000
Heating	Btu/Hr	N/A
Outdoor Temp.	F°	95
SEER		11.9
Average Cooling Capacity (ft)		600
<b>Indoor Unit</b>		
Power Supply	Volts	220
Power Supply	Hertz	60
Moisture Removal	Lbs/Hr	4.06
Weight	Lbs	72.7
Air Flow Rate	CFM	400
<b>Outdoor Unit:</b>		
Power Supply	Volts	220
Max Fuse Size	Amps	16
Running Current	Amps	6.97
Weight	Lbs	66.1
<b>Refrigerant Piping:</b>		
Max Height Difference	Feet	25
Max Total Length	Feet	40
Discharge Liquid Line	Inch	1/4"
Suction Line	Inch	1/2"
Drain Line	Inch	3/4"

**Outline and Dimensions**

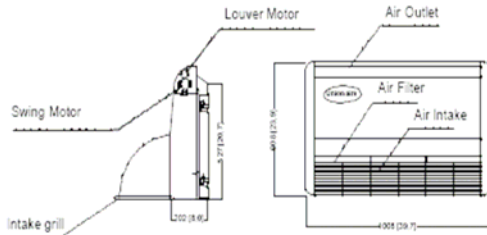

Depth: 7.95 in. Width: 39.7 in. Height: 23.9 in.

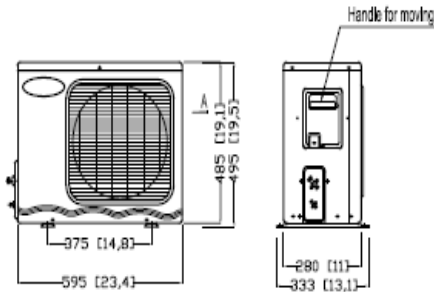

Depth: 13.11 in. Width: 23.43 in. Height: 19.49 in.

**Standard Features:**

- Five Year Compressor Warranty
- R22 Refrigerant
- "Dry" Mode Reduces Water
- 24-Hour Programmable Timer
- Low-Pressure Protection Switch
- One Year Parts Warranty
- LCD Wireless Remote
- Energy Saving "Sleep" Mode
- 3 Stage Indoor Fan Speed
- High-Pressure Protection Switch
- Low Ambient Control Kit
- Self-Diagnosis Function
- "Hydrophilic" Blue Coated Fins
- Heavy-Gauge Galvanized Steel
- Outlet Air Directional Control

**Notes:**

---



---



---